


T313

QUALITY MATTERS

The **New heavy-duty T313** provides more tractor for versatility & performance. Designed for comfort & productivity with dual HST pedals, push button PTO engagement; tractor operation has become a "Breeze". Built with plenty of strength & durability in mind, the TYM 313 will more than satisfy.



- Large Capacity Engine
- 2 Pedal HST
- 700kg Linkage Lift
- Strong 898kg Tractor

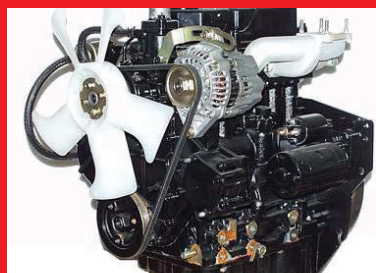

- Powered by Mitsubishi Diesel Engine
- 2 Range HST Transmission
- One-Touch PTO On-Off Switch
- Made in Korea where QUALITY MATTERS
- Cruise Control Mode
- Turning Brakes
- Spacious Operator Station

TYM TRACTORS



SPECIFICATION



www.tym-tractors.com.au

Model	T313 HST
ENGINE	
Engine Manufacturer	Mitsubishi
Engine Model	S3L2
Engine Type	Diesel 4-cycle
Engine HP-Gross	29 HP
Rated engine speed	2800
Number of cylinders	3
Displacement (cc)	1318
Air Cleaner	Dual Element
Alternator	12V 50A
Fuel System Type	IDI
Power Train	
Transmission type	HST
Number of Ranges	2(H/L)
Max. Travelling speed, mph(km/h)	11.8(19)
Brakes	Wet. Disc
Steering	Power Steering
PTO Clutch	Wet
Hydraulic System	
Pump type	Dual Gear Pump
Implement pump (L/Min)	19.6
Max Total flow (L/Min)	30
Category, 3 Point Hitch	CAT. 1(N)
Hitch lift capacity, lb. (kg)	1534(700)
at 24 inches behind link ends, lb(kg)	1102(500)
Lift Control type	Position
Joy Stick Valve	Intigrated
No. of standard remote valves	1
PTO	
PTO Type	Independent
PTO Control	Electric Switch
PTO Mid (rpm) Option	2000
PTO Rear (rpm)	540
PTO Shaft Diameter in. (mm)	1 3/8 (35)
Capacities	
Fuel Tank, U.S. gal. (L)	6.6 (25)
Cooling system U.S. qt. (L)	5.9 (5.6)
Crankcase (with filter) U.S. qt. (L)	4.5 (4.3)
Trans & Hydr. System, U.S. gal. (L)	5.8 (17)
Front Axle qt. (L)	4.7 (4.5)
Dimensions(w/ R1 Tyre)	
Overall length, in. (mm) with 3P	108(2740)
Overall width, in. (mm)	56.3(1430)
Wheelbase, in. (mm)	58.3(1480)
Height to top of ROPS, in. (mm)	91.7(2330)
Min. Ground Clearance, in. (mm)	9.8(250)
Min. Turn Radius, in (m) w/ Brakes	96.2-2442
Min. Turn Radius, in (m) w/o brakes	102(2612)
Standard Tyres	
Agricultural Front	
Agricultural Rear	
Industrial Front	25x8.5-14
Industrial Rear	14-17.5
ROPS & Weight	
Roll Over Protection Standard	ROPS
Total Weight (kg)	898
Loader 4 in 1 bucket	Opt
Counter Weight Ballast Box	Std
Backhoe	Opt



Australia Wide Distributors



National Sales Hotline
FreeCall 1800 772 407

Contact us for your nearest dealer
17 Catamaran Road Ourimbah NSW 2258
T (02) 4389 1477

E mail@inlon.com.au www.tym-tractors.com.au

Your local TYM Dealer